



VLM60/40 Series


VLM60 60 W
VLM40 40 W

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120/277 Vac, 220 to 240 Vac	60 W	12, 24, 48 Vdc	5, 2.5, 1.25 A	up to 90% typical	90°C (measured at the hot spot)	< 20%	> 0.9

Models with Flying Leads, Aluminum Case:

L 130 x W 19.85 x H 19.85 mm
(L 5.12 x W 0.78 x H 0.78 in)

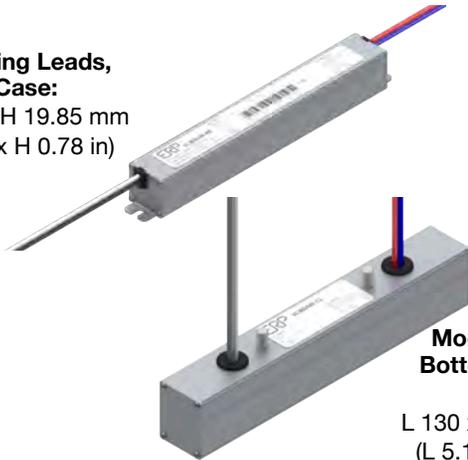

Models with "-S" Suffix, Bottom Leads with Studs, Aluminum Case:

L 130 x W 19.85 x H 23.85 mm
(L 5.12 x W 0.78 x H 0.94 in)



Typical Application Diagram

Models with "-T" Suffix (Terminal Blocks), Aluminum Case:

L 183.2 x W 19.85 x H 19.85 mm
(L 7.12 x W 0.78 x H 0.78 in)



(.) Wire Color for models with "-T" suffix (220-240 Vac)

Wiring Diagram

FEATURES

- Very high power density of 20 W/in³
- Class 2 power supply
- IP20-rated case with silicone-based potting
- 90°C maximum case hot spot temperature
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) CA Title 24 and CA Title 24 technical requirements
- Lifetime: 50,000 hours min at 70°C case temperature
- UL Class P
- Worldwide safety approvals



TYPICAL APPLICATIONS

- Strip lights
- Pendants
- Linears
- Cove Lights





VLM60/40 Series

VLM60 60 W
VLM40 40 W

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

1 - ORDERING INFORMATION

	ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Min (A)	Iout Max (A)	Open Loop Voltage (No Load Vout Max) (Vdc)	Comments
120/277 VAC NOMINAL INPUT	VLM40W							
	VLM40W-12	120/277	40	12	0.1	3.3	12.84	Aluminum case with flying leads
	VLM40W-24	120/277	40	24	0.05	1.67	25.68	Aluminum case with flying leads
	VLM40W-48	120/277	40	48	0.025	0.83	51.36	Aluminum case with flying leads
	VLM40W-12-S	120/277	40	12	0.1	3.3	12.84	Aluminum case with bottom leads and studs
	VLM40W-24-S	120/277	40	24	0.05	1.67	25.68	Aluminum case with bottom leads and studs
	VLM40W-48-S	120/277	40	48	0.025	0.83	51.36	Aluminum case with bottom leads and studs
	VLM60W							
	VLM60W-12	120/277	60	12	0.1	5	12.84	Aluminum case with flying leads
	VLM60W-24	120/277	60	24	0.05	2.5	25.68	Aluminum case with flying leads
	VLM60W-48	120/277	60	48	0.025	1.25	51.36	Aluminum case with flying leads
	VLM60W-12-S	120/277	60	12	0.1	5	12.84	Aluminum case with bottom leads and studs
	VLM60W-24-S	120/277	60	24	0.05	2.5	25.68	Aluminum case with bottom leads and studs
	VLM60W-48-S	120/277	60	48	0.025	1.25	51.36	Aluminum case with bottom leads and studs
220 to 240 VAC NOMINAL INPUT	VLM40E							
	VLM40E-12-T	220 to 240	40	12	0.1	3.3	12.84	Aluminum case with terminal blocks
	VLM40E-24-T	220 to 240	40	24	0.05	1.67	25.68	Aluminum case with terminal blocks
	VLM40E-48-T	220 to 240	40	48	0.025	0.83	51.36	Aluminum case with terminal blocks
	VLM60E							
	VLM60E-12-T	220 to 240	60	12	0.1	5	12.84	Aluminum case with terminal blocks
VLM60E-24-T	220 to 240	60	24	0.05	2.5	25.68	Aluminum case with terminal blocks	
VLM60E-48-T	220 to 240	60	48	0.025	1.25	51.36	Aluminum case with terminal blocks	

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

2 - INPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
Input Voltage Range (Vin) - Models with flying leads and with "-S" suffix - Models with "-T" suffix	Vac	90 198	120, 277 230	305 264	<ul style="list-style-type: none"> The rated output voltage for each model is achieved at $V_{in} \geq 105$ Vac & at $V_{in} \geq 249$ Vac for models with flying leads and with "-S" suffix, and at $V_{in} \geq 209$ Vac for models with "-T" suffix. At maximum load, as specified in section 1.
Input Frequency Range - Models with flying leads and with "-S" suffix - Models with "-T" suffix	Hz	47 47	60 50	63 53	
Input Current (Iin)	A			0.7 A @ 120 Vac 0.4 A @ 230 vac 0.3 A @ 277 Vac	
Power Factor (PF)		0.9	> 0.9		<ul style="list-style-type: none"> At nominal input voltage From 100% to 60% of rated power
Inrush Current	A	Meets NEMA-410 requirements			At any point on the sine wave and 25°C
Leakage Current	μ A			400 μ A @ 120 Vac 700 μ A @ 230 Vac 920 μ A @ 277 Vac	Measured per IEC60950-1
Input Harmonics	Complies with IEC61000-3-2 for Class C equipment				
Total Harmonics Distortion (THD)				20%	<ul style="list-style-type: none"> At nominal input voltage From 100% to 60% of rated power Complies with DLC (Design Light Consortium) technical requirements
Efficiency	%	-	up to 90%	-	Measured with nominal input voltage
Isolation	The AC input to the main DC output is isolated and meets Class II reinforced/double insulation power supply 				

3 - MAIN OUTPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
Output Voltage (Vout)	Vdc		12, 24, 48		See ordering information for details
Output Current (Iout)	A			12 Vdc: 5.0 A 24 Vdc: 2.5 A 48 Vdc: 1.25 A	The rated output voltage for each model is achieved at $V_{in} \geq 105$ Vac & at $V_{in} \geq 249$ Vac for models with flying leads and with "-S" suffix, and at $V_{in} \geq 209$ Vac for models with "-T" suffix.
Output Voltage Regulation	%	-5		5	<ul style="list-style-type: none"> At nominal AC line voltage Includes load and current set point variations.
Output Voltage Overshoot	%	-	-	10	The driver does not operate outside of the regulation requirements for more than 500 ms during power on with maximum load.
Ripple Voltage	$\leq 5\%$ of rated output voltage for each model				<ul style="list-style-type: none"> Measured at maximum load and nominal input voltage Calculated in accordance with the IES Lighting Handbook, 9th edition
Start-up Time	ms			500	<ul style="list-style-type: none"> Measured from application of AC line voltage to 100% light output Complies with California Title 24 and ENERGY STAR® luminaire specification.



VLM60/40 Series

VLM60 60 W
VLM40 40 W

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

4 - ENVIRONMENTAL CONDITIONS

	Units	Minimum	Typical	Maximum	Notes
Operating Ambient Temperature (Ta)	°C	-20		50	50°C is the non-derated temperature (Refer to section 7 "Output power de-rating at higher temperatures").
Maximum Case Temperature (Tc)	°C			+90	Case temperature measured at the hot spot •tc (see label in page 13)
Storage Temperature	°C	-40		+85	
Humidity	%	5	-	95	Non-condensing
Cooling	Convection cooled				
Acoustic Noise	dBA			22	Measured at a distance of 1 foot (30 cm)
Mechanical Shock Protection	per EN60068-2-27				
Vibration Protection	per EN60068-2-6 & EN60068-2-64				
MTBF	> 200,000 hours when operated at nominal input and output conditions, and at Tc ≤ 70°C				
Lifetime	50,000 hours at Tc ≤ 70°C maximum case hot spot temperature (see hot spot •tc on label in page 13)				

5 - EMC COMPLIANCE AND SAFETY APPROVALS

EMC Compliance			
Conducted and Radiated EMI	<ul style="list-style-type: none"> • Models with flying leads and with "-S" suffix: Compliant with FCC CFR Title 47 Part 15 Class B at 120 Vac & Class A at 277 Vac • Models with "-T" suffix: EN55015 (CISPR 15) compliant at 220, 230, and 240 Vac 		
Harmonic Current Emissions	IEC61000-3-2	For Class C equipment	
Voltage Fluctuations & Flicker	IEC61000-3-3		
Immunity Compliance	ESD (Electrostatic Discharge)	IEC61000-4-2	6 kV contact discharge, 8 kV air discharge, level 3
	RF Electromagnetic Field Susceptibility	IEC61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at a distance of 3 meters
	Electrical Fast Transient	IEC61000-4-4	± 2 kV on AC power port for 1 minute, ±1 kV on signal/control lines
	Surge	IEC61000-4-5	<ul style="list-style-type: none"> • ± 2 kV line to line (differential mode) / ± 2 kV line to common mode ground (tested to secondary ground) on AC power port, ±0.5 kV for outdoor cables • Higher surge is available. Please contact your ERP representative or send an email to SaveEnergy@erp-power.com.
			ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A, 2.5 kV ring wave
	Conducted RF Disturbances	IEC61000-4-6	3V, 0.15-80 MHz, 80% modulated
Voltage Dips	IEC61000-4-11	>95% dip, 0.5 period; 30% dip, 25 periods; 95% reduction, 250 periods	

Safety Agency Approvals	
UL	Models with flying leads and with "-S" suffix: UL8750 listed Class 2
cUL	Models with flying leads and with "-S" suffix: CAN/CSA C22.2 No. 250.13-14 LED equipment for lighting applications
CE	Models with "-T" suffix: IEC61347-2-13 electronic control gear for LED Modules & EN55015 (EMC compliance)
CB	For models with "-T" suffix
ENEC	For models with "-T" suffix

Safety					
	Units	Minimum	Typical	Maximum	Notes
Hi Pot (High Potential) or Dielectric voltage-withstand	Vdc	3750			<ul style="list-style-type: none"> • Insulation between the input (AC line and Neutral) and the output • Tested at the RMS voltage equivalent of 2652 Vac

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

6 - PROTECTION FEATURES

Under-Voltage (Brownout)

The VLM60/40 series provides protection circuitry such that an application of an input voltage below the minimum stated in section 1 (Input Specification) shall not cause damage to the driver.

Short Circuit and Over Current Protection

The VLM60/40 series is protected against short-circuit such that a short from any output to return shall not result in a fire hazard or shock hazard. The driver shall hiccup as a result of a short circuit or over current fault. Removal of the fault will return the driver to within normal operation. The driver shall recover, with no damage, from a short across the output for an indefinite period of time.

Internal Over temperature Protection

The VLM60/40 is equipped with an internal temperature sensor on the primary power train. Failure to stay within the convection power rating will cause the driver to shut down. The main output current will be resumed when the temperature of the built-in temperature sensor cools adequately.

Output Open Load

A no load condition will not damage the VLM60/40 or cause a hazardous condition. The driver will remain stable and operate normally after application of a load. When the LED load is removed, the output voltage of the VLM60/40 series is limited to 7% about the output voltage of each model.

Over Power Protection

The VLM60/40 will shut down and auto recover when its input power exceeds approximately 110% of 96 W. This condition will cause no damage to the power supply.

Input Over Current Protection

The VLM60/40 series incorporates a primary AC line fuse for input over current protection.

7 - OUTPUT POWER DE-RATING AT ELEVATED TEMPERATURES

The VLM60/40 series can be operated with cooling air temperatures above 50°C by linearly de-rating the total maximum output power (or current) by 2.5%/°C from 50°C to 70°C (see figure 1).

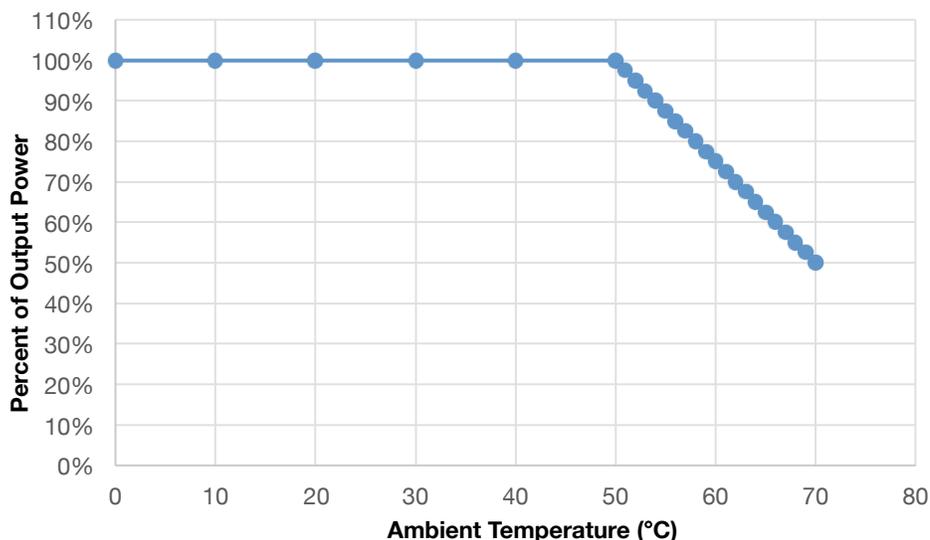


Figure 1

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

8 - PREDICTED LIFETIME VERSUS CASE AND AMBIENT TEMPERATURE

Lifetime is defined by the measurement of the temperatures of all the electrolytic capacitors whose failure would affect light output under the nominal LED load and worst case AC line voltage. The graphs in figure 1 are determined by the electrolytic capacitor with the shortest lifetime, among all electrolytic capacitors. It represents a worst case scenario in which the LED driver is powered 24 hours/day, 7 days/week. The lifetime of an electrolytic capacitor is measured when any of the following changes in performance are observed:

- 1) Capacitance changes more than 20% of initial value
- 2) Dissipation Factor ($\tan \delta$): 150% or less of initial specified value
- 3) Equivalent Series Resistance (ESR): 150% or less of initial specified value
- 4) Leakage current: less of initial specified value

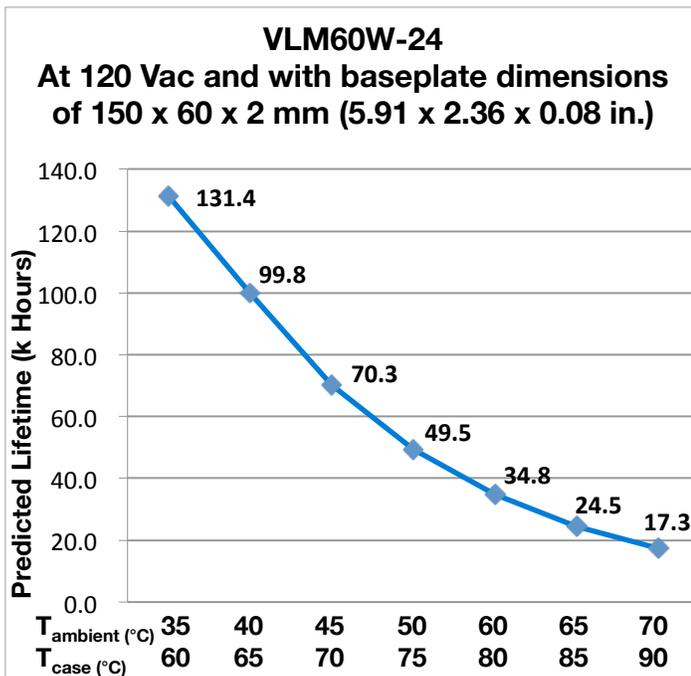


Figure 2

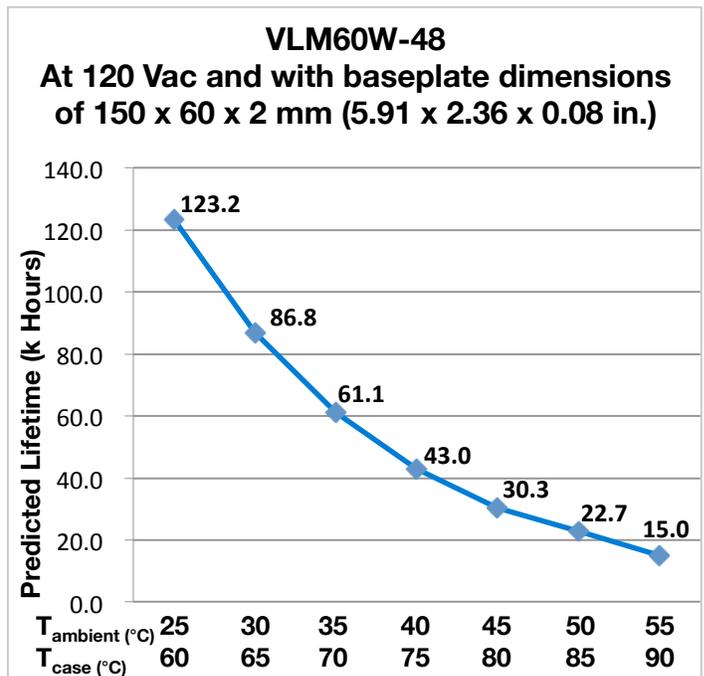


Figure 3

Notes:

- The ambient temperature T_{ambient} and the differential between T_{ambient} and T_{case} mentioned in the above graphs are relevant only as long as both the driver and the light fixture are exposed to the same ambient room temperature. If the LED driver is housed in an enclosure or covered by insulation material, then the ambient room temperature is no longer valid. In this situation, please refer only to the case temperature T_{case} .
- It should be noted the graph "Lifetime vs. Ambient Temperature" may have an error induced in the final application if the mounting has restricted convection flow around the case. For applications where this is evident, the actual case temperature measured at the T_c point in the application should be used for reliability calculations.

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

9 – EFFICIENCY VERSUS LOAD

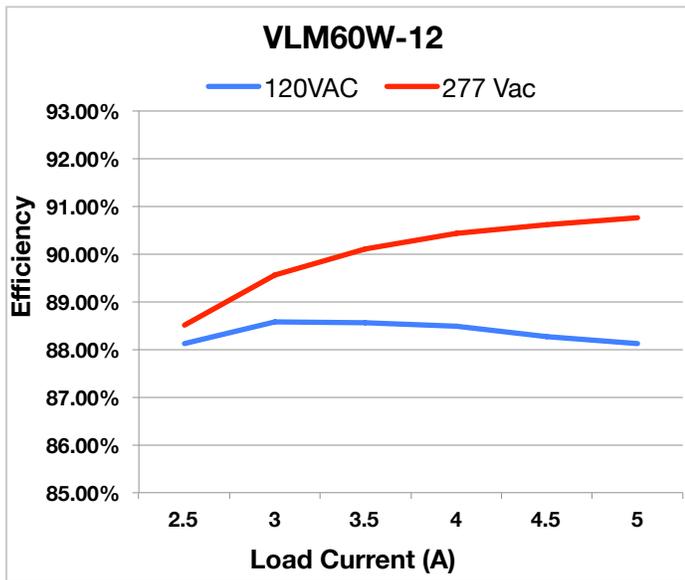


Figure 4

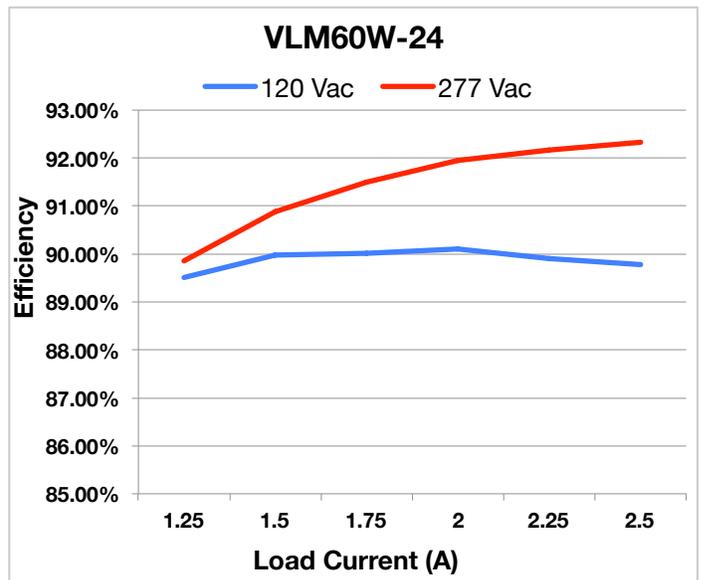


Figure 5

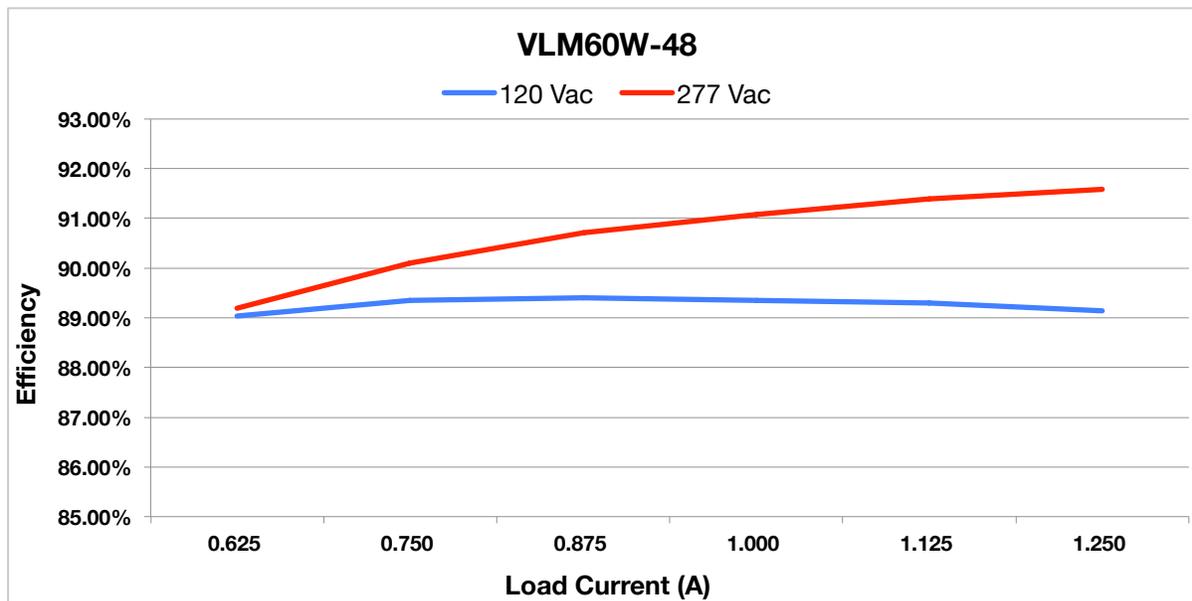


Figure 6

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

10 – POWER FACTOR VERSUS LOAD

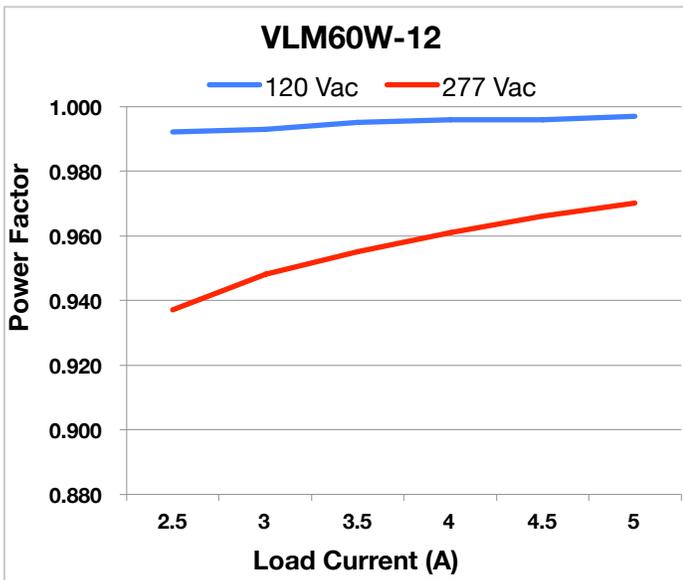


Figure 7

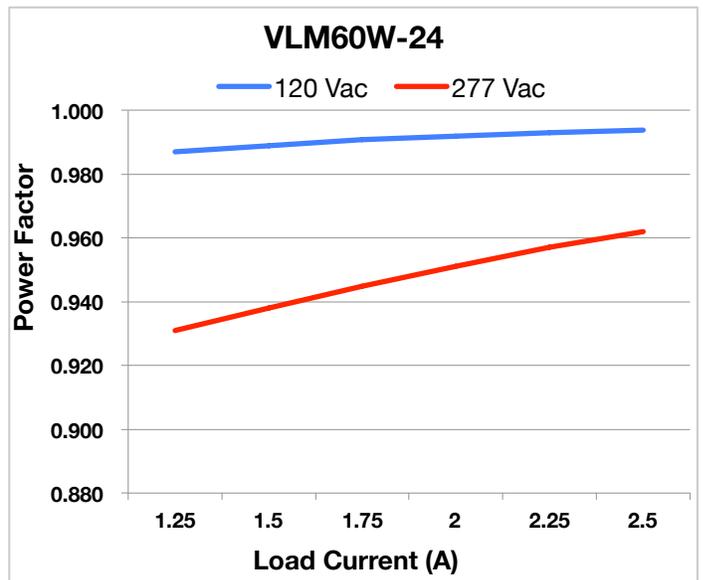


Figure 8

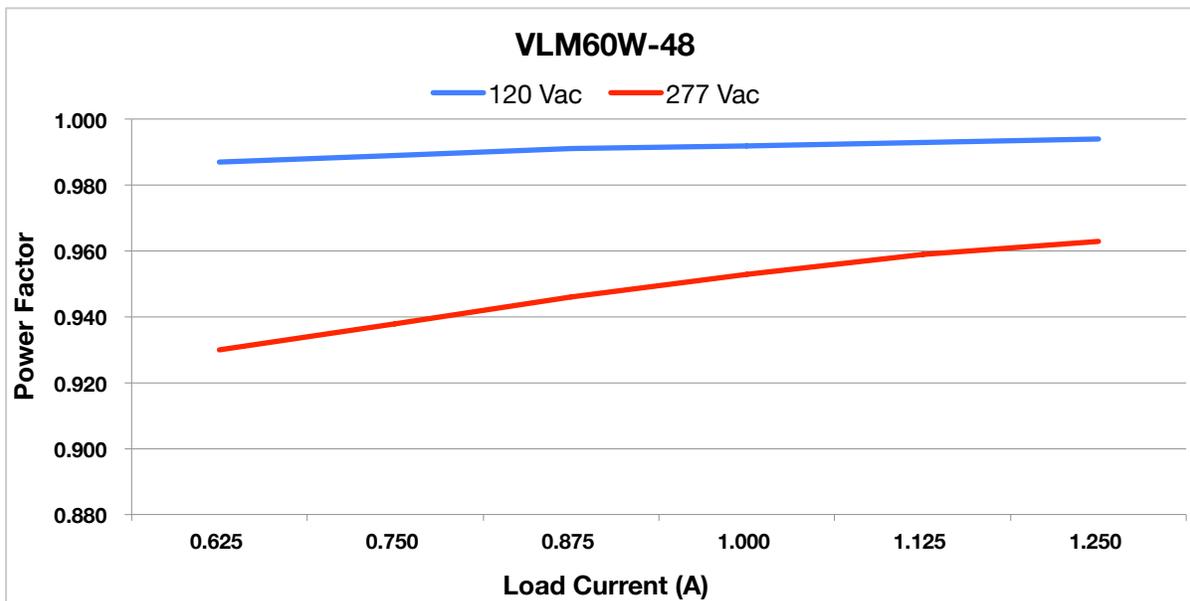


Figure 9

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

11 – THD VERSUS LOAD

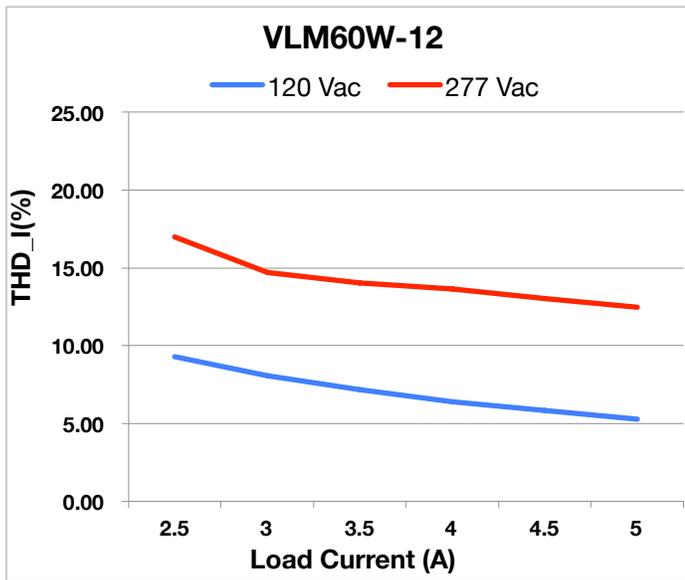


Figure 10

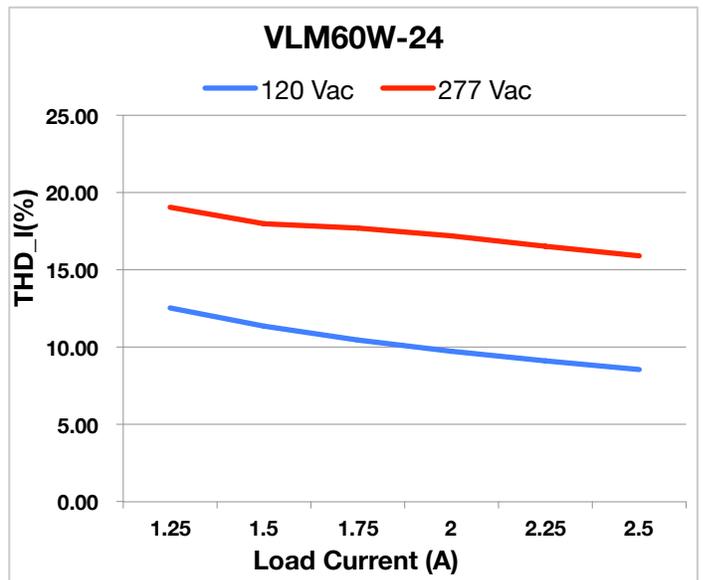


Figure 11

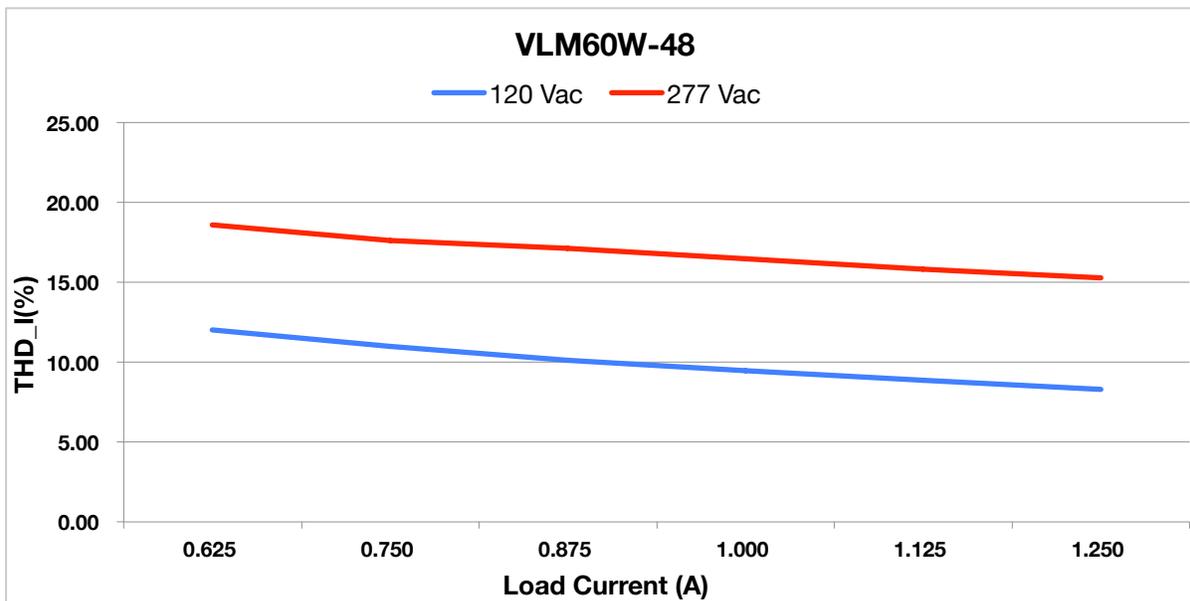


Figure 12

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

12 - MECHANICAL DETAILS

- **Packaging Options:** Aluminum case
- **I/O Connections:**
 - **Models with flying leads:** 18 AWG on all leads, 203mm (8 in) long, 105°C rated, stranded, stripped by approximately 9.5 mm, and tinned. All the wires, on both input and output, have a 300 V insulation rating.
 - **and with "S" suffix:** Terminal blocks
 - **Models with "T" suffix:** Terminal blocks
- **Ingress Protection:** IP20 rated
- **Mounting Instructions:** The VLM60/40 driver case must be secured on a flat surface through the two mounting tabs, shown here below in the case outline drawings. We recommended mounting the VLM60/40 on a baseplate with dimensions of 150 x 60 x 2 mm (5.91 x 2.36 x 0.08 in).

13 - OUTLINE DRAWINGS (MODELS WITH FLYING LEADS)

Dimensions: L 130 x W 19.85 x H 19.85 mm (L 5.12 x W 0.78 x H 0.78 in)
Weight:

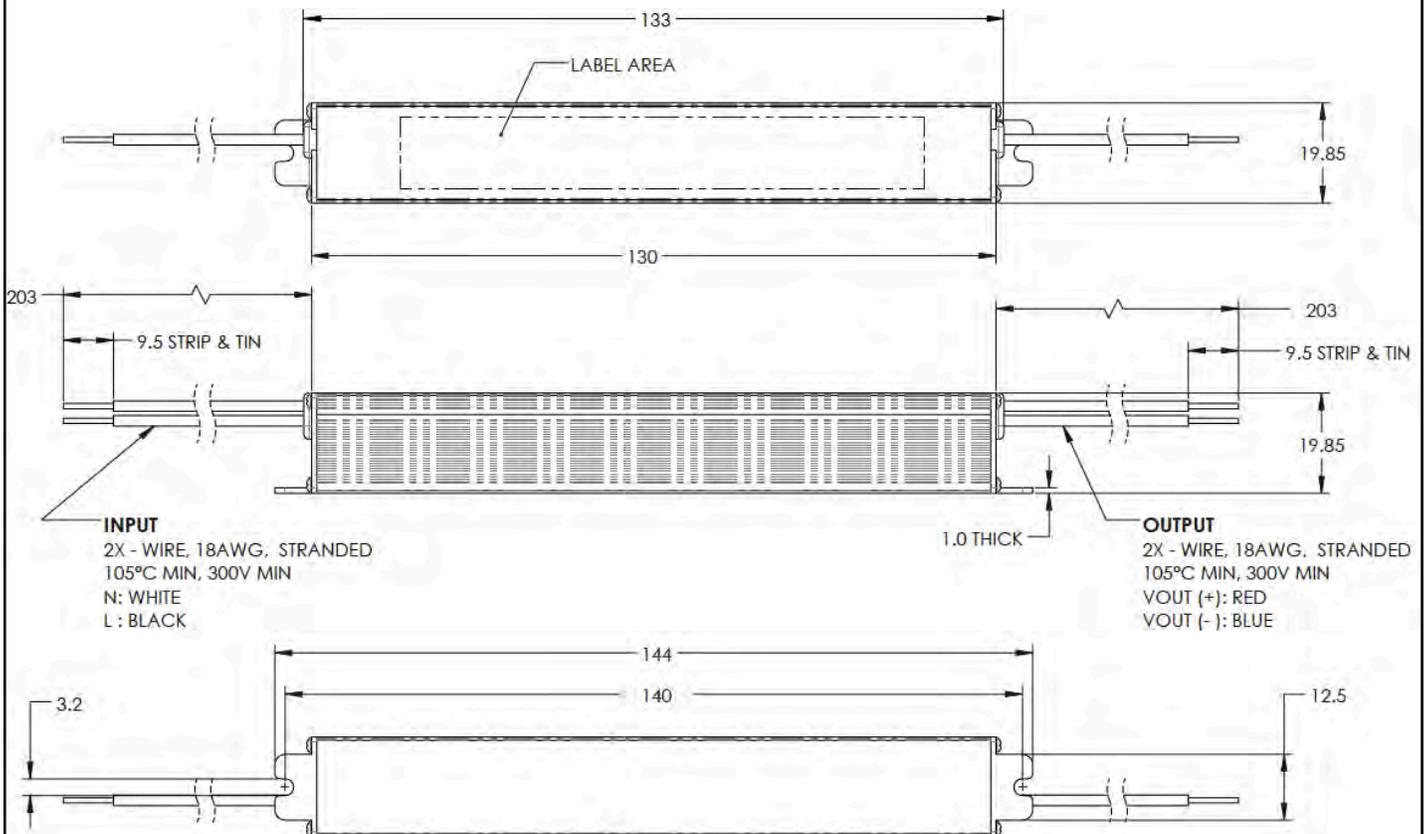



Figure 13

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

14 - OUTLINE DRAWINGS (MODELS WITH "-T" SUFFIX: TERMINAL BLOCKS)

Dimensions: L 183.2 x W 19.85 x H 19.85 mm (L 8.03 x W 0.78 x H 0.78 in)

Weight:

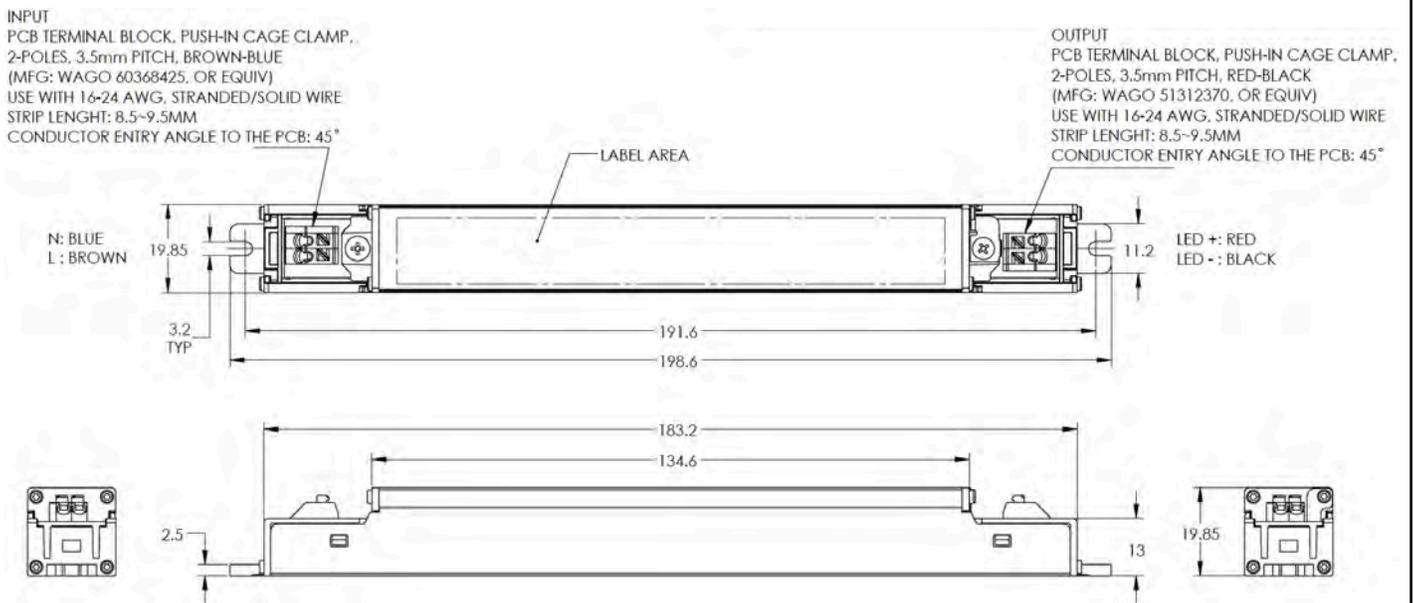


All dimensions are in mm

Figure 14

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

15 - OUTLINE DRAWINGS (MODELS WITH "-S" SUFFIX: BOTTOM LEADS AND STUDS)

Dimensions: L 130 x W 19.85 x H 19.85 mm (L 5.12 x W 0.78 x H 0.78 in)
Weight:

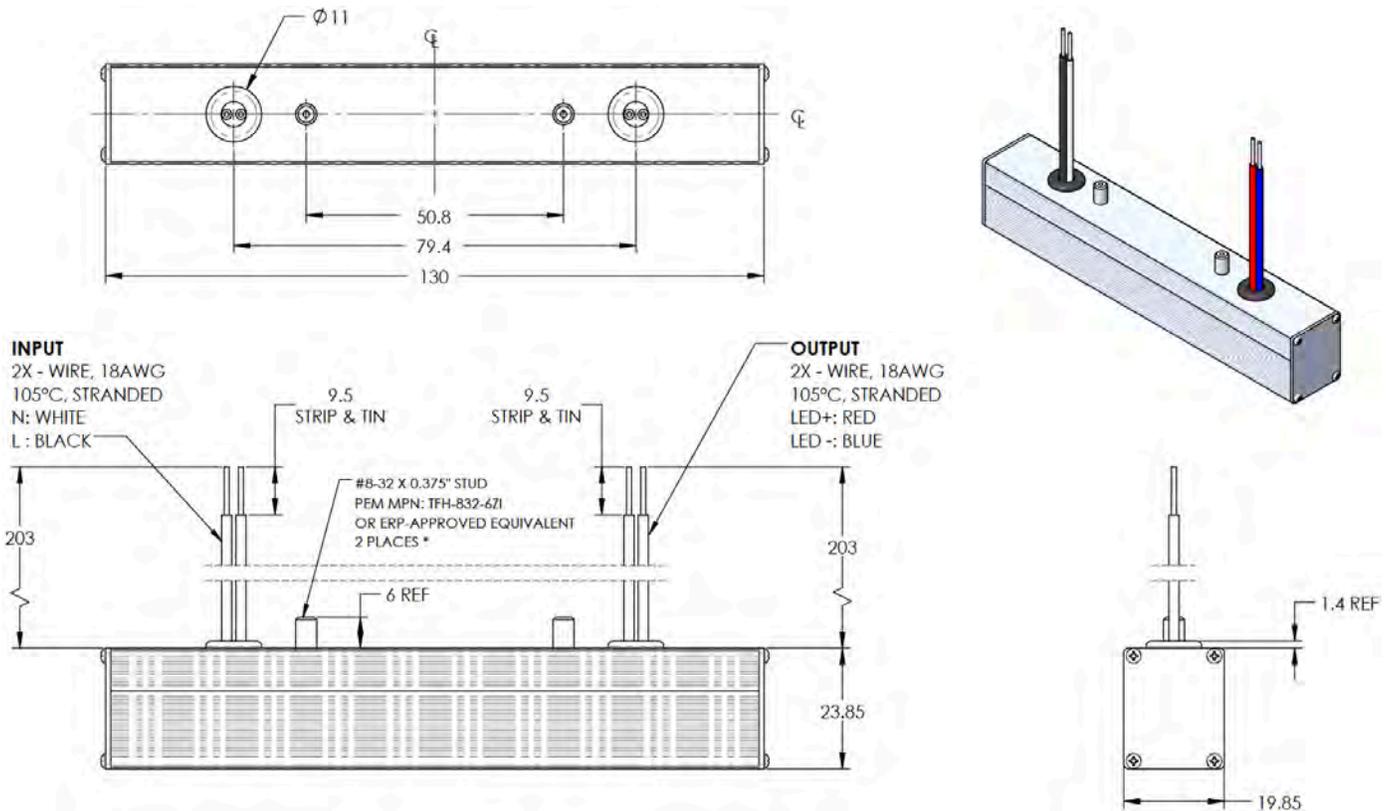

All dimensions are in mm

Figure 15



VLM60/40 Series

VLM60 60 W
VLM40 40 W

60 & 40 W, Efficient, Compact Non-Dimmable CV Class 2 LED Drivers

16 - LABELING

The VLM60-24 is used in figure 16 as an example to illustrate a typical label.

 VLM60W-24 Constant Voltage LED Driver Max Case Temperature $t_c = 90^{\circ}\text{C}$ Suitable for Dry or Damp Locations <i>Convient aux endroits secs et humides</i>	AC INPUT: 120/277 V - 0.7 A 60 Hz PF ≥ 0.9 , THD $\leq 20\%$	Designed in the USA Manufactured in China	Class 2 / Classe 2	 	DC OUTPUT: Max Current 2.5 A --- Maximum Power 60 W Regulated Voltage 24 Vdc
	L : BLACK N : WHITE			LED + : RED LED - : BLUE	

Figure 16

USA Headquarters
 Tel: +1-805-517-1300
 Fax: +1-805-517-1411
 893 Patriot Drive, Suite E,
 Moorpark, CA 93021, USA

CHINA Operations
 Tel: +86-756-6266298
 Fax: +86-756-6266299
 No. 8 Pingdong Road 2
 Zhuhai, Guangdong, China 519060

ERP Power, LLC (ERP) reserves the right to make changes without further notice to any products herein. ERP makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ERP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in ERP data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ERP does not convey any license under its patent rights nor the rights of others. ERP products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the ERP product could create a situation where personal injury or death may occur. Should Buyer purchase or use ERP products for any such unintended or unauthorized application, Buyer shall indemnify and hold ERP and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ERP was negligent regarding the design or manufacture of the part. ERP is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.